




DS-2CC5102/5112/5172/5182/5192P(N) Dome Camera / HD Dome Camera

- 1/3" SONY CCD
- Up to 650 TVL Horizontal Resolution
- Compact Design
- Day & Night Auto Switch
- 3-axis Adjustment
- Aux Video Output



Unit: mm

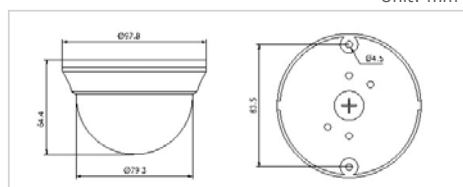

Specifications

	DS-2CC5102P(N)	DS-2CC5112P(N)	DS-2CC5172P(N)	DS-2CC5182P(N)	DS-2CC5192P(N)
Camera	Image Sensor	1/3" SONY Super HAD CCD II			
	Signal System	PAL / NTSC			
	Effective Pixels	PAL: 500 (H) × 582 (V) NTSC: 510 (H) × 492 (V)			
	Min. Illumination	0.1 Lux @ (F1.2, AGC ON) 0.28 Lux @ (F2.0, AGC ON)			
	Shutter Time	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s			
	Lens	3.6 mm @ F2.0 (2.8 mm, 6 mm, 8 mm, 12 mm, 16 mm optional)			
	Lens Mount	M12			
	Angle Adjustment	Pan: 0 - 355°, Tilt: 0 - 90°, Rotation: 0 - 355°			
	Day & Night	Electronic			
	Horizontal Resolution	420 TVL	480 TVL	540 TVL	600 TVL
General	Synchronization	Internal synchronization			
	Video Output	1Vp-p composite output (75 Ω / BNC); Test monitor out [1Vp-p composite output (75 Ω / BNC), device line]			
	S/N Ratio	More than 50 dB			
	Operating Conditions	-10 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)			
	Power Supply	12 V DC ± 10%			
	Power Consumption	Max. 2 W			
	Dimension	Φ 97.8 × 64.4 mm (Φ 3.85" × 2.54")			
	Weight	300 g (0.66 lbs)			

Available Models

PAL: DS-2CC5102P, DS-2CC5112P, DS-2CC5172P, DS-2CC5182P, DS-2CC5192P;
 NTSC: DS-2CC5102N, DS-2CC5112N, DS-2CC5172N, DS-2CC5182N, DS-2CC5192N;